

HSF

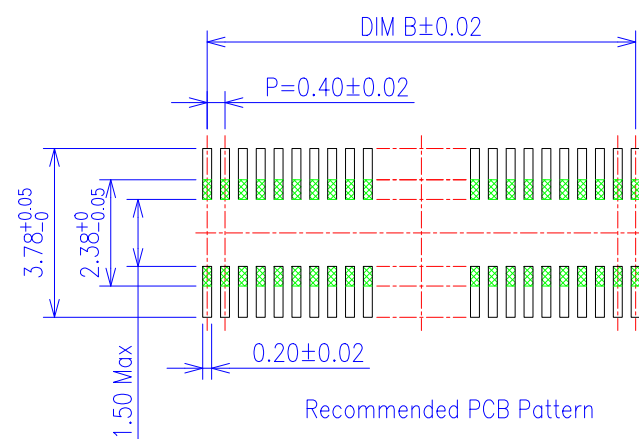
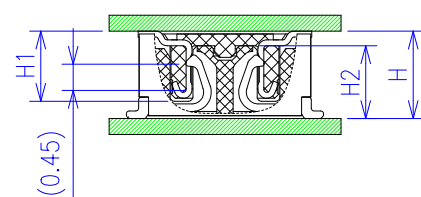
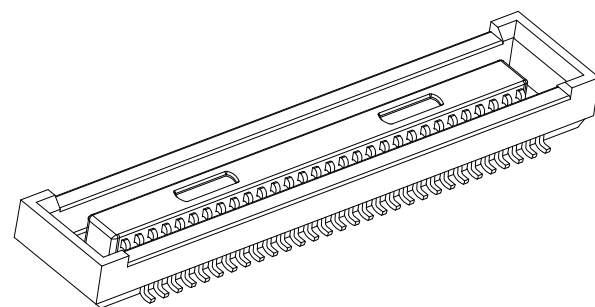

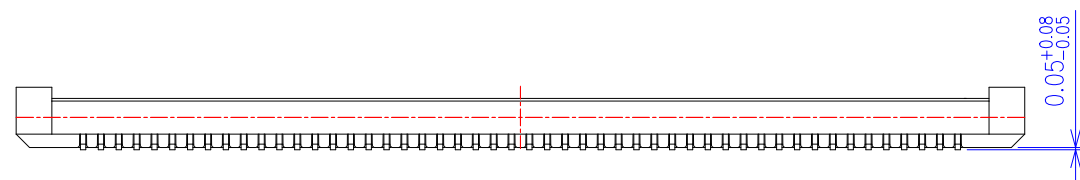
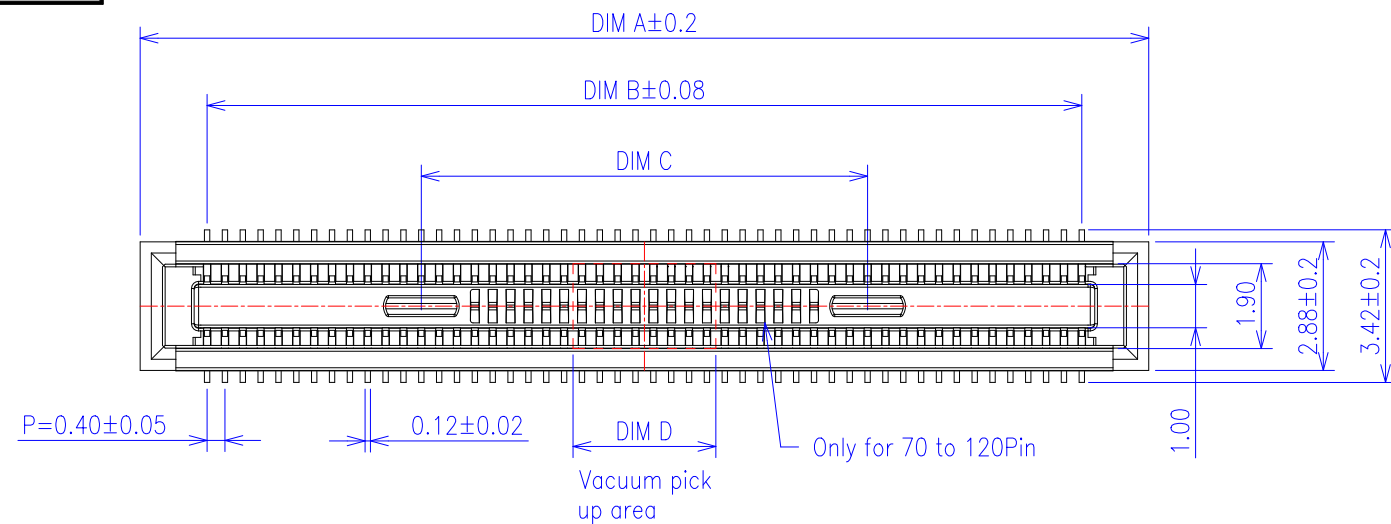


TABLE 3

PLUG (H1)	SOCKET (H2)	STACKING HEIGHT (H)
1.14	1.40	1.50
	1.90	2.00
	2.40	2.50
	2.90	3.00
	3.40	3.50
	3.90	4.00

TABLE 2

PART NO.	NO. of Pos.	DIM A	DIM B	DIM C	DIM D
YWH40-BS0101400	10	4.60	1.60	—	1.00
YWH40-BS0121400	12	5.00	2.00	—	1.00
YWH40-BS0201400	20	6.60	3.60	1.93	1.00
YWH40-BS0241400	24	7.40	4.40	2.43	1.20
YWH40-BS0301400	30	8.60	5.60	3.18	1.50
YWH40-BS0341400	34	9.40	6.40	3.68	2.30
YWH40-BS0401400	40	10.60	7.60	5.08	3.20
YWH40-BS0441400	44	11.40	8.40	5.86	3.20
YWH40-BS0501400	50	12.60	9.60	5.50	3.20
YWH40-BS0601400	60	14.60	11.60	6.00	3.20
YWH40-BS0701400	70	16.60	13.60	7.00	3.20
YWH40-BS0801400	80	18.60	15.60	8.00	3.20
YWH40-BS0901400	90	20.60	17.60	9.00	3.20
YWH40-BS1001400	100	22.60	19.60	10.00	3.20
YWH40-BS1201400	120	26.60	23.60	14.00	3.20

TOLERANCES UNLESS OTHERWISE SPECIFIED GENERAL X ±0.40 XX ±0.25 XXX ±0.15 ANGLES ±3° SCALE 1:1 SHEET 1 OF 1 UNIT mm	DRAWN Bruce	DATE 04/28/23		
	DESIGN Bruce	DATE 04/28/23		
	CHECKED Roc.W	DATE 04/28/23	TITLE 0.4mm PITCH,BTB,VERTICAL SMT,H=1.40mm	
	APPROVED Roc.W	DATE 04/28/23		
	3D FILE YWH40-BS***1400		SERIES YWH40	SIZE A4
			DWG NO. C_YWH40-BS140	REV. A

NOTES:

1. MATERIAL SEE TABLE 1;
2. ELECTRICAL PERFORMANCES;
 - 2-1. RATED CURRENT: 0.3A;
 - 2-2. RATED VOLTAGE: 50V AC/DC;
 - 2-3. CONTACT RESISTANCE: 90 mΩ Max;
 - 2-4. INSULATION RESISTANCE: 50MΩ min. Measured at 100V DC;
 - 2-5. WITHSTANDING VOLTAGE: 150V AC for 1 Min.;
3. MECHANICAL PERFORMANCES;
 - 3-1. DURABILITY: 30 CYCLES;
 - 3-2. OPERATION TEMPERATURE: -55° To +85°C;

TABLE 1

ITEM	COMPONENT	Q'TY	MATERIAL	COLOR/FINISH
1	HOUSING	1	LCP	BLACK
2	TERMINAL	N	C5191	Ni 50~90u"UNDERPLATING GOLD FLASH OVER ALL