
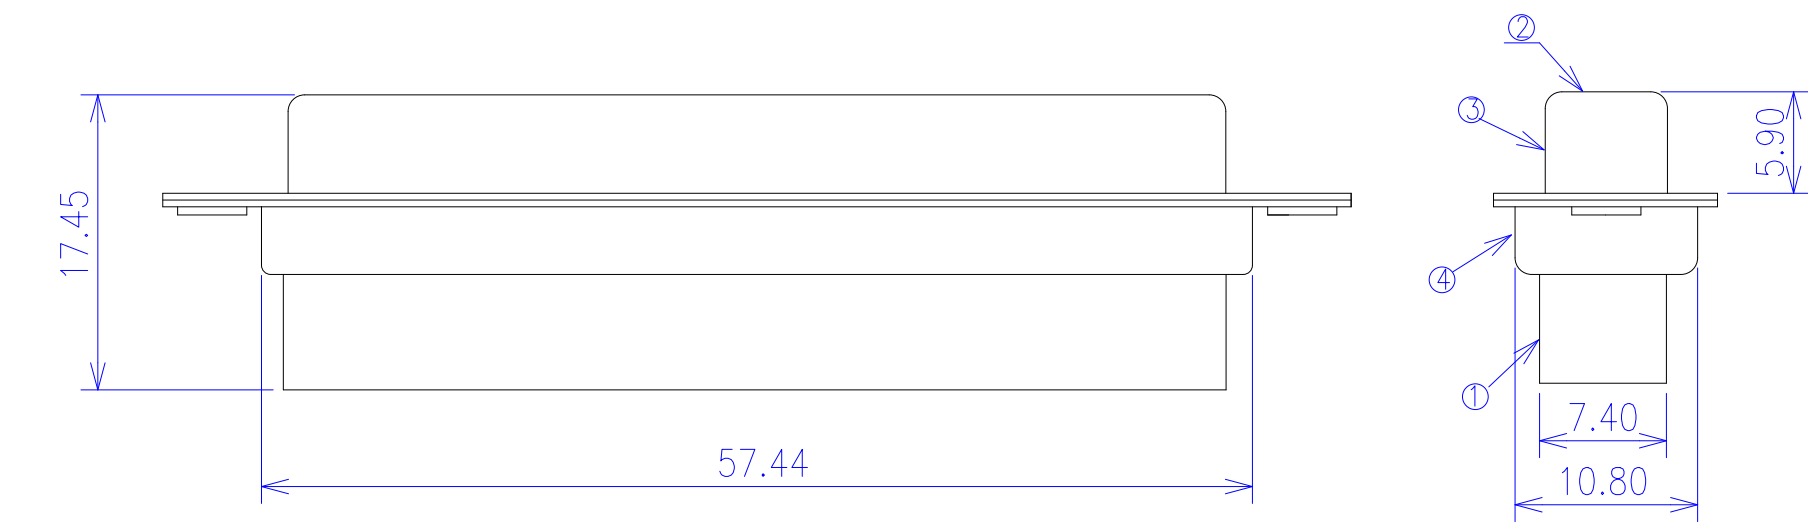


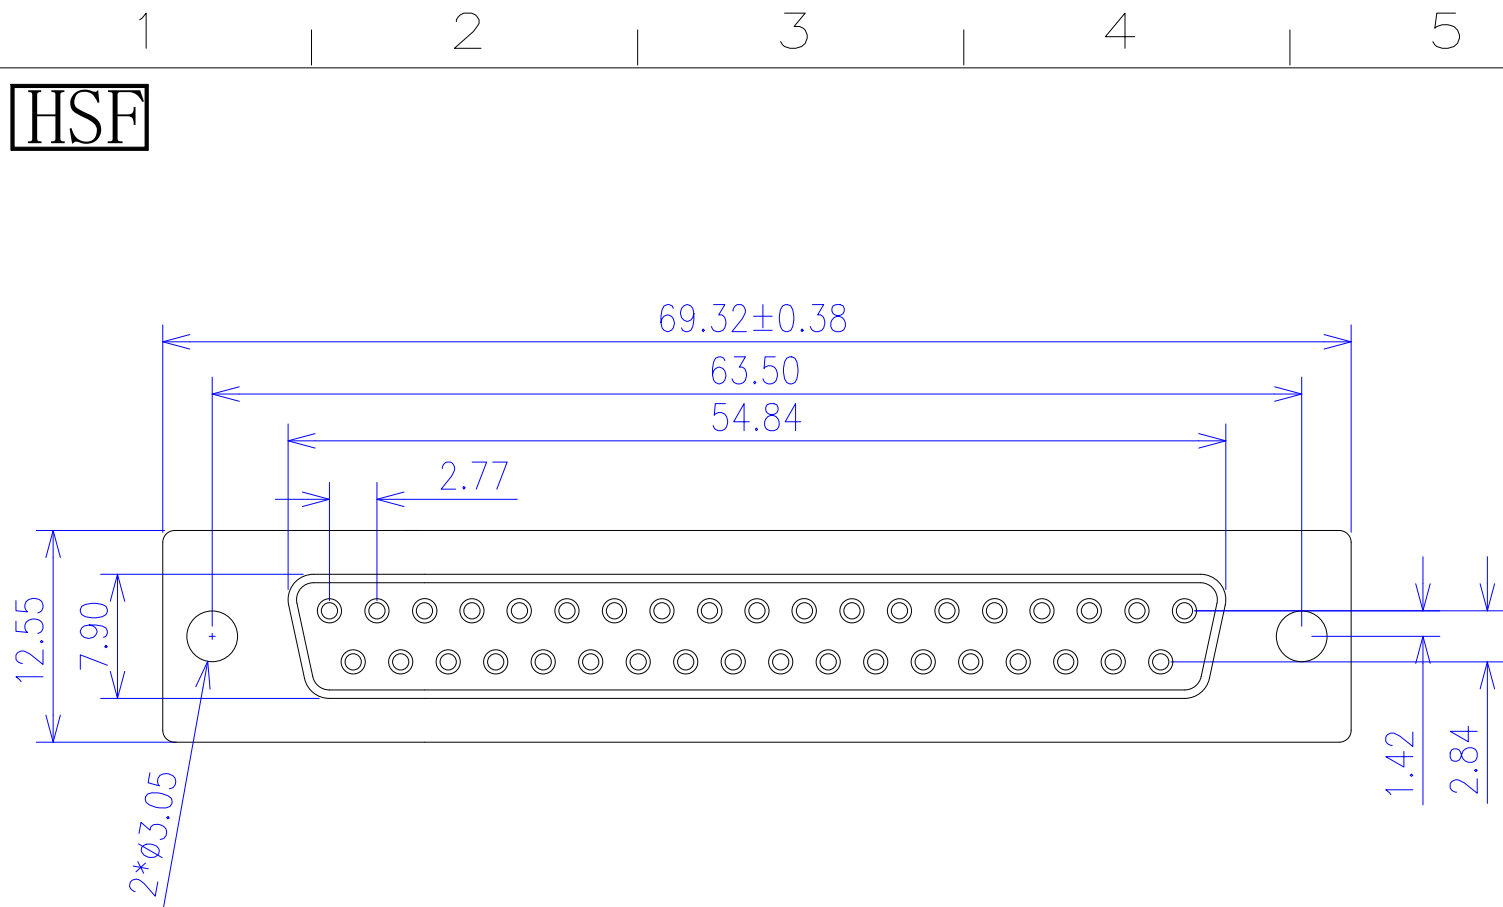

REV.	DESCRIPTION	DATE	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	02/18/13'	Bruce		Roc.W

- NOTES:
- 1. MATERIAL SEE TABLE 1;
 - 2.ELECTRICAL PERFORMANCES;
 - 2-1.RATED CURRENT:5A;
 - 2-2.RATED VOLTAGE:250V AC/DC;
 - 2-3.CONTACT RESISTANCE: 25 mΩ Max;
 - 2-4.INSULATION RESISTANCE: 5000MΩ min. Measured at 500V DC;
 - 2-5.WITHSTANDING VOLTAGE: 1000V AC for 1 Min.;
 - 3. MECHANICAL PERFORMANCES:
 - 3-1.OPERATION TEMPERATURE:-40° To +105°C;
 - 4.USE WITH TERMIANL:YWSDC-TS**

TABLE 1

ITEM	COMPONENT	Q'TY	MATERIAL	COLOR/FINISH
1	HOUSING 1	1	PBT	SEE TABLE 2
2	HOUSING 2	1	PBT	SEE TABLE 2
3	FORET SHELL	1	STEEL	Ni OVER ALL
4	BACK SHELL	1	STEEL	TIN OVER NI

TABLE 2

PART NO.	HOUSING COLOR
YWSDC-S37B0000	BLACK
YWSDC-S37U0000	BLUE
YWSDC-S37W0000	WHITE

TOLERANCES UNLESS OTHERWISE SPECIFIED GENERAL X ±-- X ±0.40 XX ±0.25 XXX ±-- ANGLES ±3° SCALE 1:1 SHEET 1 OF 1 UNIT mm	DRAWN	DATE		
	Bruce	02/18/13'		
	DESIGN	DATE	TITLE	
	Bruce	02/18/13'		
3D FILE	CHECKED	DATE	2.77 PITCH,D_SUB,37 CIRCUIT SOCKET, STAMP TERMINAL,CRIMPING TYPE, WITHOUT SCREW	
	APPROVED	DATE	SERIES	SIZE
Roc.W		02/18/13'	YWSDC	A4
YWSDC-S3700			DWG NO. C_YWSDC-S3700	REV. A