


HSF

REV.	DESCRIPTION	DATE	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	02/18/13'	Bruce		Sam.W

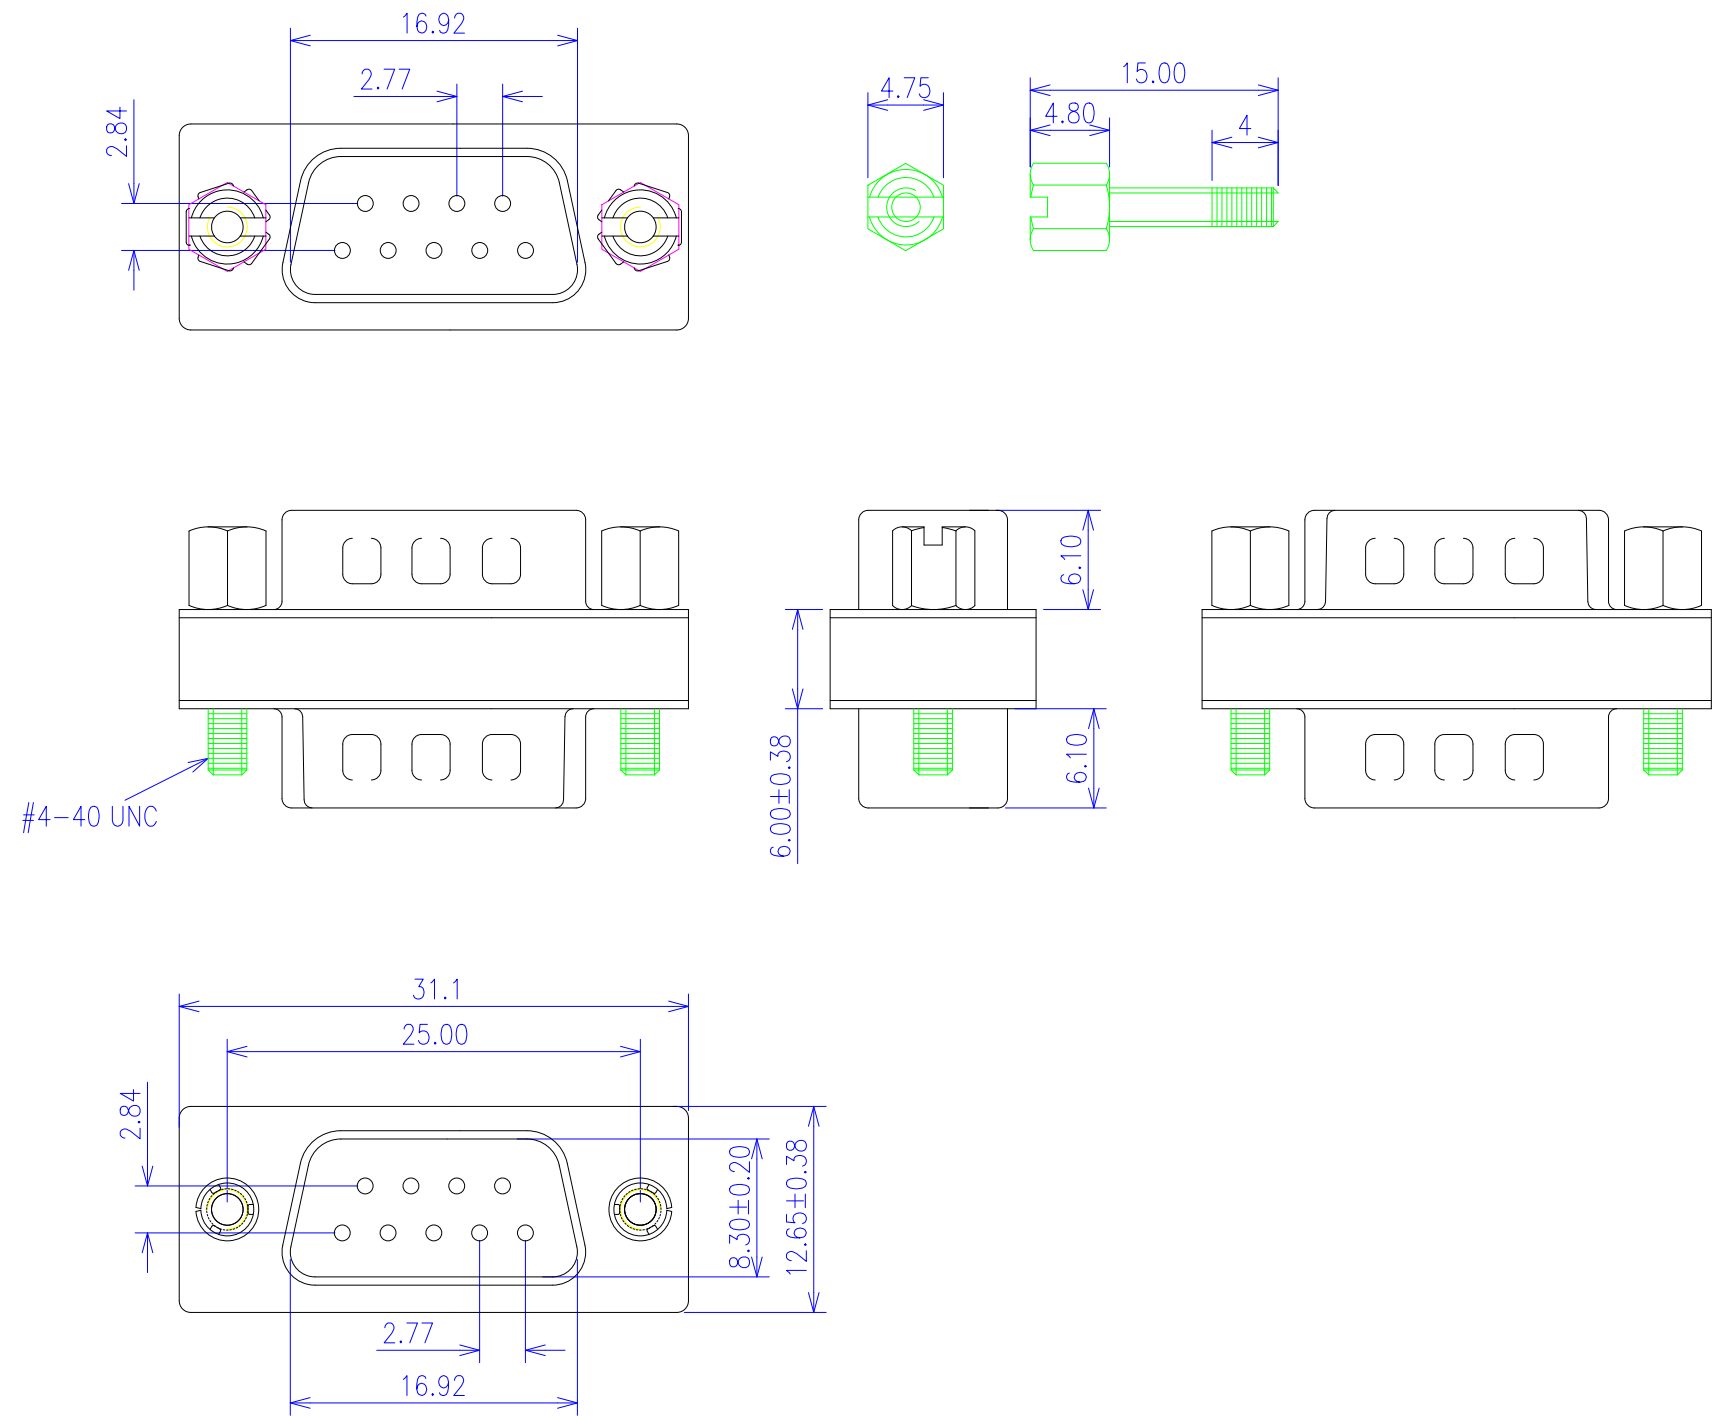

- NOTES:
1. MATERIAL
1-1.HOUSING:PBT,BLACK;
1-2.TERMINAL:BRASS, PLATING SEE TABLE 2;
1-3.SHELL:STELL,Tin OVER ALL;
 - 2.ELECTRICAL PERFORMANCES;
2-1.RATED CURRENT:5A;
2-2.RATED VOLTAGE:250V AC/DC;
2-3.CONTACT RESISTANCE: 25 mΩ Max;
2-4.INSULATION RESISTANCE: 1000MΩ min. Measured at 500V DC;
2-5.WITHSTANDING VOLTAGE: 1000V AC for 1 Min.;
 3. MECHANICAL PERFORMANCES:
3-1.DURABILITY:500 CYCLES FOR PLATING GOLD 30u'';
3-2.OPERATION TEMPERATURE:- 40° To +105°C;

TABLE 1	
PART NO.	HOUSING COLOR
YWTDB-PP09B01**	BLACK

TABLE 2		
SELECTIVE GOLD TYPE		
CODE:**	CONTACT AREA	OTHER AREA
S1	GOLD FLASH	TIN
S2	GOLD 3u''	TIN
S3	GOLD 10u''	TIN
S4	GOLD 15u''	TIN
S5	GOLD 30u''	TIN

GOLD OVER ALL		
CODE:**	CONTACT AREA	OTHER AREA
A1	GOLD FLASH	GOLD FLASH
A2	GOLD 3u''	GOLD FLASH
A3	GOLD 10u''	GOLD FLASH
A4	GOLD 15u''	GOLD FLASH
A5	GOLD 30u''	GOLD FLASH

TOLERANCES UNLESS OTHERWISE SPECIFIED GENERAL X ±-- XX ±0.40 XXX ±0.25 ANGLES ±3°	DRAWN Bruce	DATE 02/18/13'		
	DESIGN Bruce	DATE 02/18/13'		
	CHECKED 	DATE 		
	APPROVED Sam.W	DATE 02/18/13'		
SCALE 1:1	3D FILE YWTDB-PP0901		TITLE 2.77 PITCH,D_SUB,9 CIRCUIT,PLUG TO PLUG,ADAPTER,STAMP TERMINAL,WITH NUT	
SHEET 1 OF 1			SERIES YWTDB	SIZE A4
UNIT mm			DWG NO. C_YWTDB-PP0901	REV. A

This document and information contained herein are the property of YW Precision Electronics(Guangdong)Co.Ltd
copies are issued in strict confidence and shall not be reproduced or copied,or used as the basic of manufacture
or sale of apparatus without permission

All materials meet the YW Precision Electronics(Guangdong)Co.Ltd spec.
environment-related substances management technical standard